


Profiled Sheet FTB 3 façade

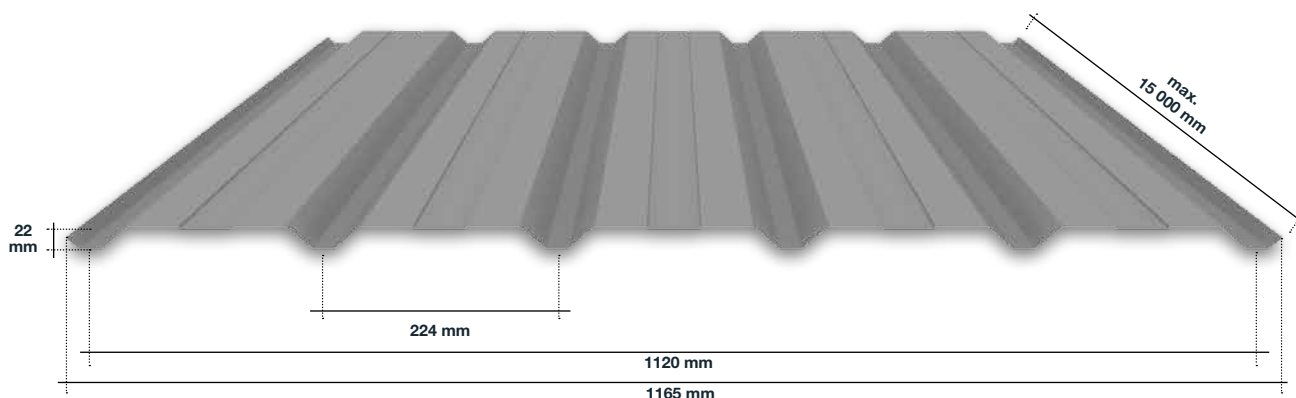

Characteristics:

| | | STANDARD | BY REQUEST | | |
|------------------|-----------------|--------------|---------------------------------|--------------------------------------|----------------|
| Metallic support | Steel grade | S220GD+Z | DX51D+Z, S250GD+Z a S350GD+Z | | |
| | Steel thickness | 0,4 a 0,5 mm | 0,6 mm | 0,7 mm | |
| | Coating | Galvanized | 140 a 180 gr/m² Up to 275 gr/m² | | |
| | | Pre-painted | Polyester (25 µm) | PVDF (25/35 µm) | HDX (55 µm) |
| | | | Colours | Available in the RAL chart Remaining | |

If you need other characteristics that aren't described on the table(s), please contact FTB technical department.